




EN ISO 20345:2011

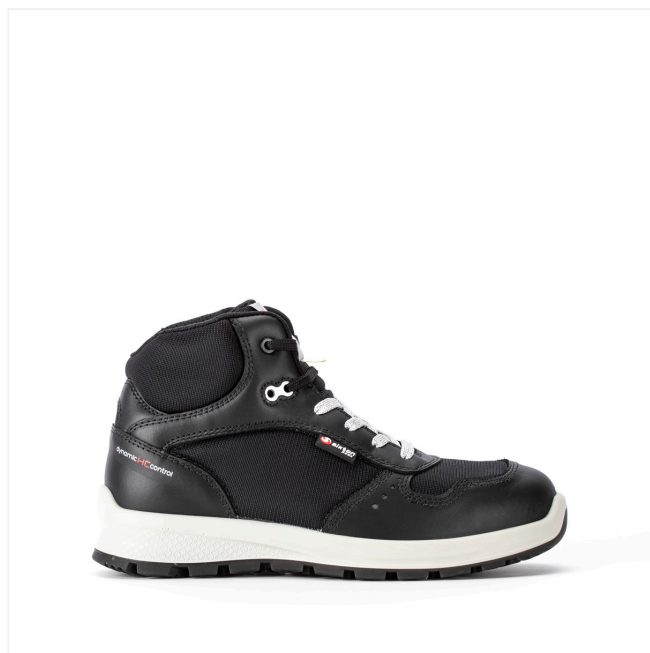

SKIPPER LADY

WINDEX HIGH
95414-00L
S3 SRC
Size: 35-42 Lady

Weight: 430 gr.

Fit: 11

Working Environment:

 Logistics and Light Industry,
 Finishing-off building,
 Components and Automotive, ESD
 Areas


FEATURES

TOMAIA

 Grain leather Hydro 1,6-1,8 mm
 Fabric of High Tenacity
 Fabric of High Tenacity
 Reflex insert

FODERA

3D Air circulation 320 gr.

FOD. ANTISCIVOLO

DUALMICRO

SUOLETTA

Five 4 Fit "lady"

PUNTALE

Alu SXT 2.0 Toe cap

RESISTENZA ALLA PERFORAZIONE

KX Antiperforation PS

TIPOLOGIA

Ankle boot

SUOLA

PU DUAL-DENSITY SRC

Double density PU outsole with tread designed mainly for indoor use. Self-cleaning design and highly non-slip grip. SRC Antislip standard.

TECNOLOGIE

Suoletta Intercambiabile



Highly breathable and absorbent anatomic insole. Multilayer structure to take advantage of the peculiarities of each component. Dry and with a comfortable memory foam "pillow"



Elementi di Protezione


 RESISTANT
 TO 3.0 mm.
 NAILS

alu-sxt2.0
 aluminium

Toecap "Alu Sxt 2.0" with differentiated thicknesses, resistant to 200J. Non metal perforation resistant Insert to over 1100 N with a 3.0 mm truncated cone nail. Protection over the entire sole of the foot. Flexible and comfortable



Stabilità Trasversale

dynamic HC control
 technology

Ergonomic rigid internal structure. It houses the heel into the right seat, adjusting the foot support and control of the ankle sideways movements. It keeps the foot tight to the shoe, allowing the perfect fit.



Stabilità Torsione

STABIL•ACTIVE

Support made of rigid plastic material. It stabilizes the heel bone, the instep and tarsal joints, without altering energy absorption. A support for the natural movement of the foot; it provides comfort and greater stability.



Caratteristiche Elettriche



ESD footwear discharge static electricity and avoid damaging surrounding objects; they are designed in compliance with the following standards: IEC EN 61340-5-1:2016 - IEC EN 61340-4-3:2018 - IEC EN 61340-4-5:2018.

Altro

DUALMICRO
DUALMICRO

Double non-slip layer of microfibre, resistant up to 200,000 cycles. Makes the footwear more comfortable, blocking the foot during use.



SRC (SRA+SRB)


 SOLE 95
 PU - PU

SRA CERAMIC + DETERGENT SOLUTION	FLAT ≥0.32 HEEL (CONTACT ANGLE °) ≥0.28	0.38
SRB STEEL + GLYCEROL	FLAT ≥0.18 HEEL (CONTACT ANGLE °) ≥0.13	0.21
		0.24

EN ISO 20344:2011